


# IPsec SA setup

- At the successful completion of a PANA exchange a PANA SA is setup
- This SA is used for re-auth and for subsequent PANA message security
- It does not provide security for user data
  
- Proposal:
  - Bootstrap an IPsec SA between the client and the AR using the PANA SA
  - This is NOT part of the PANA protocol itself
  
- Question:
  - Should the WG specify how the IPsec SA can be setup based on the PANA SA?
  - Not inventing anything new here
  - Possibly an informational RFC

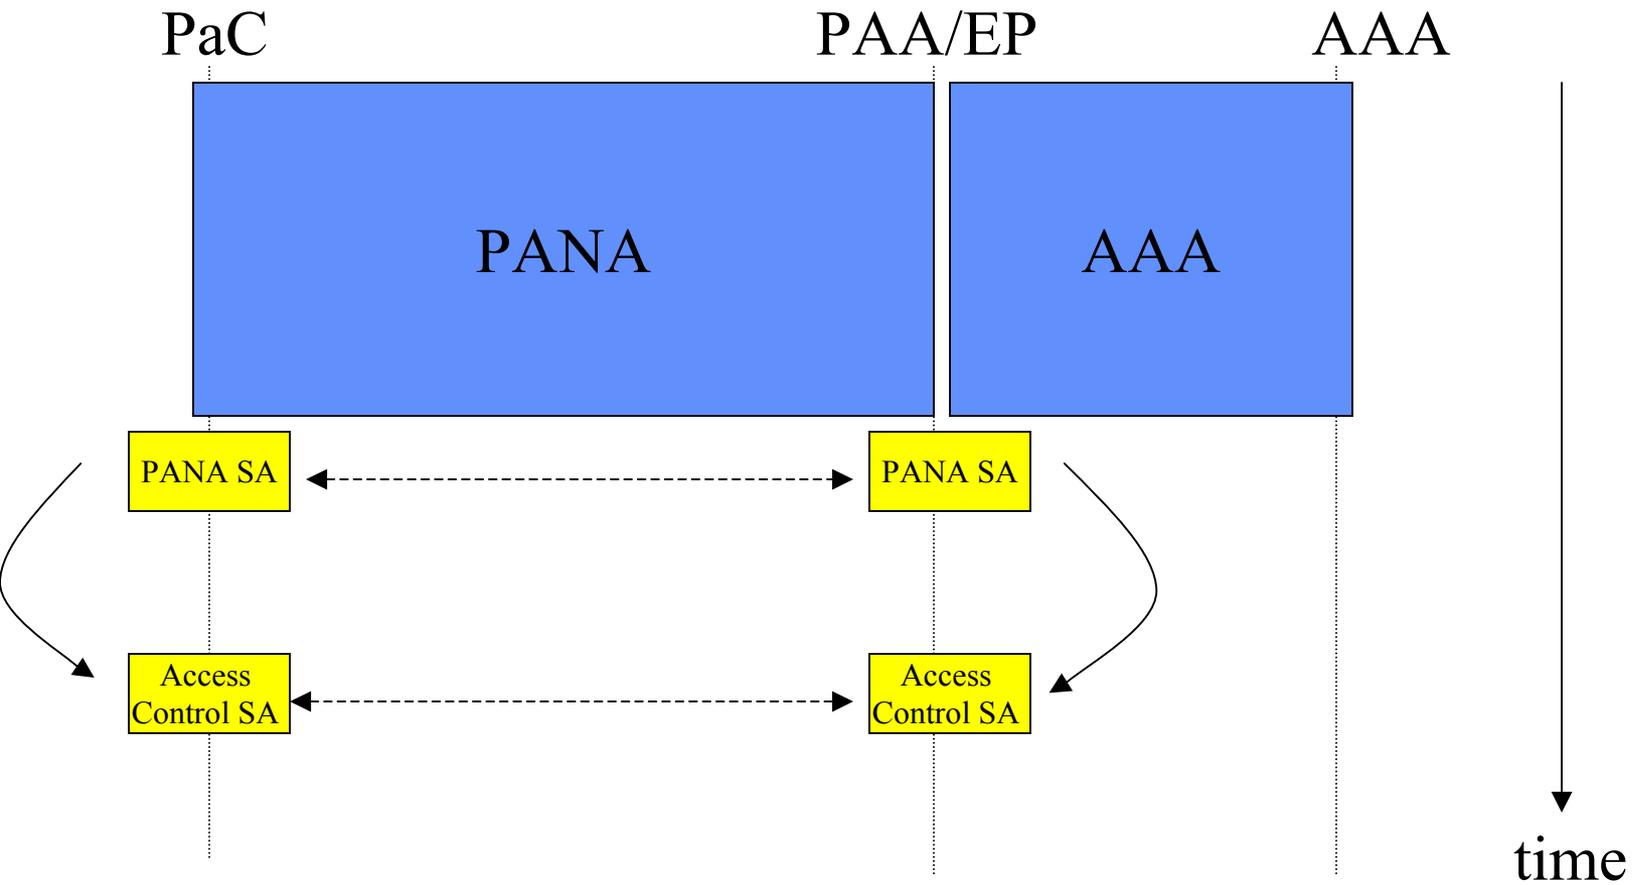

# Next Steps

- IETF LC on Usage Scenarios
- WG LC on Threat analysis and Requirements I-Ds
- PAA-EP protocol discussion
- Continue work on the solution draft
  - Target for IETF57 – Consensus on solution approach via ML discussions