


draft-ietf-avt-ulp-08.txt

0	1	2	3
0 1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1
++	++	++	++
E L P X CC M PT recovery SN base			
++	++	++	++
	TS recovery		
++	++	++	++
length recovery mask			
++	++	++	++
mask cont. (present only when L = 1)			
++	++	++	++

In RFC 2733, these recovery data was filled into the RTP header, and do not confirm to the normal definition of the corresponding fields. To resolve this issue, they are moved to FEC header.

draft-ietf-avt-ulp-08.txt

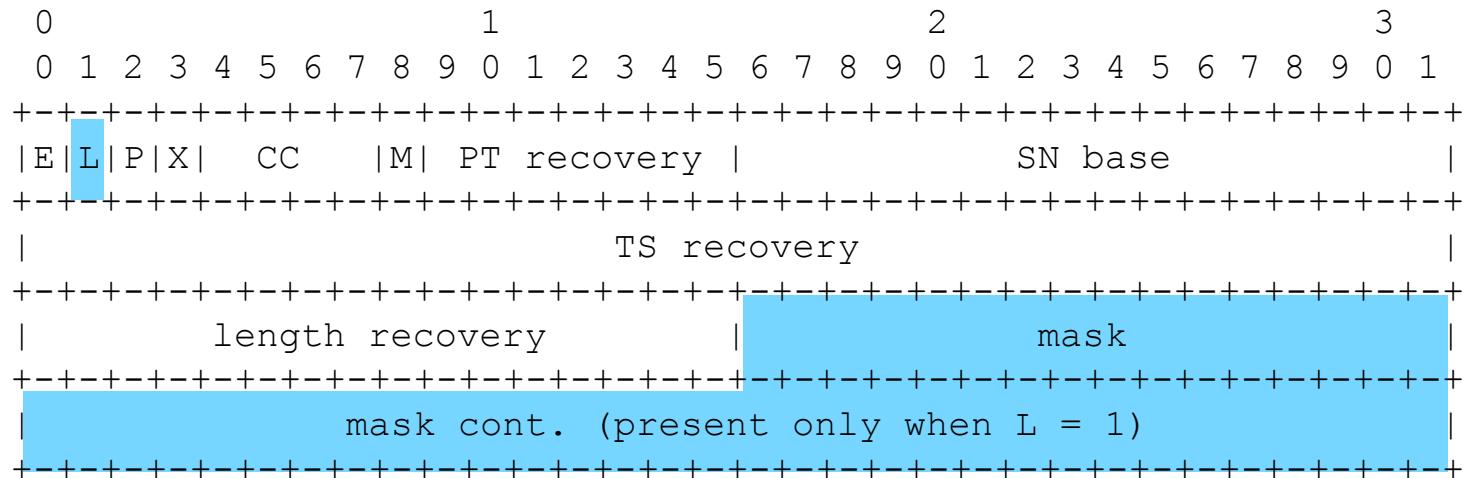

To accommodate the extra 8 bits used, the mask length is changed from 24-bit to 16-bit/48-bit with an L-flag added to indicate whether the long mask is in use.