
## Multrans Use Cases

Wang Qian, China Telecom Xie Chongfeng, China Telecom Cathy Zhou, Huawei Technologies Tina Tsou, Huawei Technologies (USA)


## 6-6-4 Case

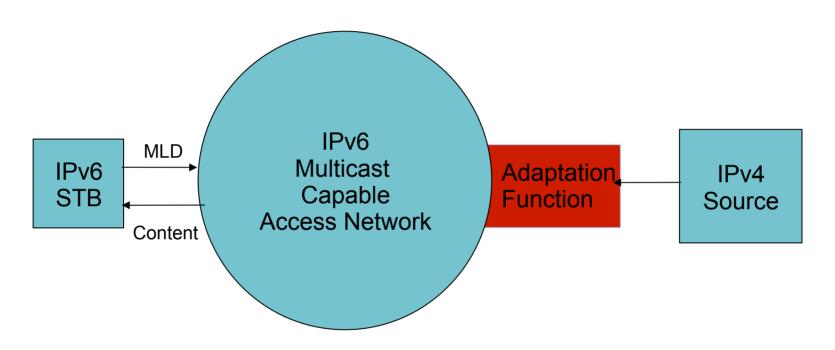

- Accessing IPv4-formatted multicast content from an IPv6-only receiver. The access network is IPv6 capable.
- Only one adaptation function instance is needed, at the IPv4/IPv6 boundary.

## 6-4-6-4 Case

Section 3.2, draft-jaclee-behave-v4v6-mcast-ps-03

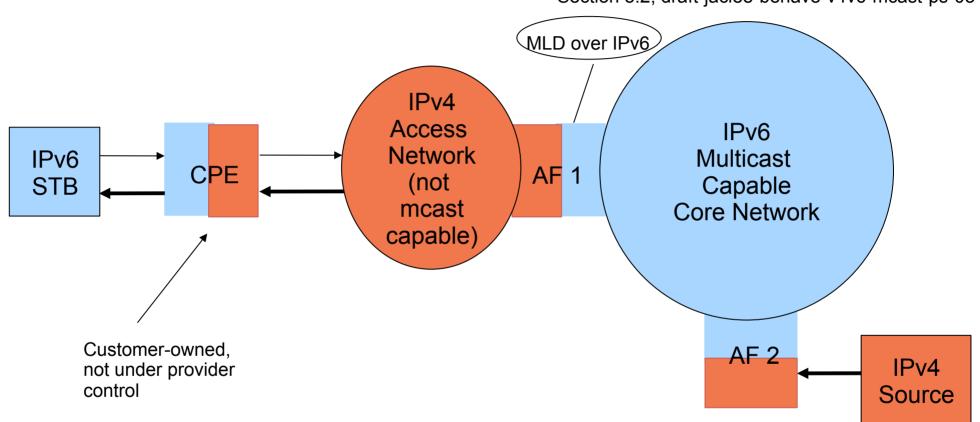

- IPv6 Receiver Connected to an IPv4 Source Through an IPv4 Multicast-Disabled Access Network and an IPv6 Multicast Network
- AF2 performs similar function as AF in 6-6-4 case.